



भेरीगंगा नगरपालिका
नगर कार्यपालिकाको कार्यालय
छिन्चु, सुर्खेत
कर्णाली प्रदेश, नेपाल

Fax ०८३- ५४०११०
Phone ०८३- ५४०१५४

प.सं. :- ०८१/०८२
च नं : २०८८

मिति: २०८२/०२/०६

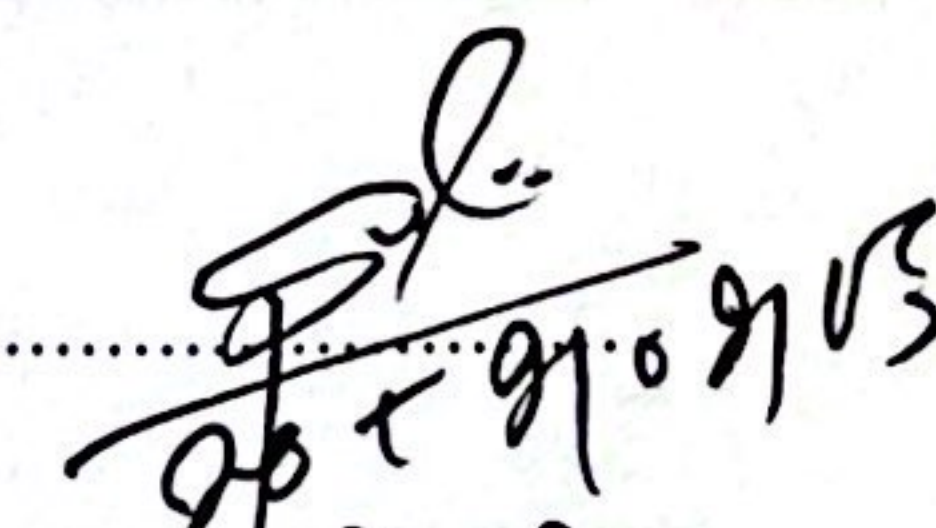
विषय :- दररेट पेश गर्ने बारे सूचना ।

श्री सम्बन्धित सरोकारवाला सबै ।

प्रस्तुत बिषयमा यस भेरीगंगा नगरपालिकाको तपसिलमा उल्लेखित कार्य गर्नुपर्ने देखिएको हुदा यस कार्यालय बाट सूचना प्रकाशित भएको मितिले ७ दिन भित्र (मिति २०८२/०२/१२ गते दिनको ५:०० बजे सम्ममा) इच्छुक सप्लायर्स/फर्महरूले भेरीगंगा नगरपालिकाको वेबसाइट www.bherigangamun.gov.np मा यसै सूचना साथ राखिएको BOQ भरि सुचिकृत भई आफ्नो दररेट सिलबन्दी गरि यस नगरपालिकाको कार्यालयमा पेश गर्नुहुन सम्बन्धित सरोकारवालामा यो सूचना प्रकाशित गरिएको छ ।

नोट: म्याद नाघी पेश भएका प्रस्ताव मान्य हुने छैन ।

क्र. सं.	कार्यक्रमको नाम	अधिकतम रकम रु. (भ्याट सहित)	आवश्यक कागजात
१.	ठुलो खोला देखि सुनारी खोरिया जोड्ने ग्रामिण कृषि सडक निर्माण, भेरीगंगा ३	रु.२,०२,७०८.९३/-	१. आ.व.२०८०/०८१ को करचुक्ता प्रमाणपत्रको प्रतिलिपि २. फर्म/सप्लायर्स दर्ता संग सम्बन्धित सम्पूर्ण कागजातहरूको प्रतिलिपि ३. सुचिकृत भएको रसिद तथा प्रमाणको प्रतिलिपि
२.	अर्जुन सुनारको घर पछाडीको चिरामा कुलो निर्माण कार्य, भेरीगंगा १०	रु.२,००,१८५.१९/-	


प्रमुख प्रशासकीय अधिकृत

कृष्ण प्रसाद पौडेल
प्रमुख प्रशासकीय अधिकृत



Bheriganga Municipality
Office Of The Municipal Executive
Chhinchu , Surkhet
Karnali Province, Nepal



Bill Of Quantity

Name Of Project :Arjun sunarko ghar pachhadi chirama kulo nirman
Location : Bheriganga Municipality

Ward no :- 10

FY : 2081/082

Item No.	Description Of Item Of Works	Unit	Quantity	Rate(NRS)		Amount(NRS)	Remarks
				In Figure	In Words		
	Earthwork in excavation in medium type soils in foundation including 10m hauling distance and 1.8 m. lift all complete in approval of site engineer by manually	M3	8.05				
	Supplying and stone soling in proper line and level with sand filling all complete as per approved drawing, specification and instruction of site engineer.	M3	3.22				
	Plain cement Concrete (PCC) for RCC works M 20(1:2:4) for slab/lintels/columns/beams with approved quality of cement, sand and machine crushed stone aggregate including supply of materials,mixing, laying, curing the work at least 7 days etc all complete as per approved drawing, Specification and instruction of site engineer.	M3	7.08				
	supplying, straightening, cleaning, cutting, binding & fixing in position with annealed tying binding wire all complete as per approved drawing, Specification and instruction of site engineer.	Kg	325.78				
	Formwork shuttering, centering with 19mm thick waterproof ply board and steel post for all works necessary propping, scaffolding, staging, supporting inclusive of wedging and cutting holes for utilization till the support if fully unyielding nett all complete as per approved drawing, Specification and instruction of site engineer.	M2	45.08				
				Sub Total Amount NRS.			
				Vat @ 13% NRS.			
				Total Amount With Vat NRS.			
				Total Amount in Words			

Signature & Stamps

Proprietor's Name :-
Address :-
Phone No. :-

Name Of the Firm/Supplier's :-
Firms Registration No :-
PAN/VAT Reg. No. :-