




Fax ०८३- ५४०११०
Phone ०८३- ५४०१५४

भेरीगंगा नगरपालिका
नगर कार्यपालिकाको कार्यालय
छिन्दु, सुर्खेत
कर्णाली प्रदेश, नेपाल

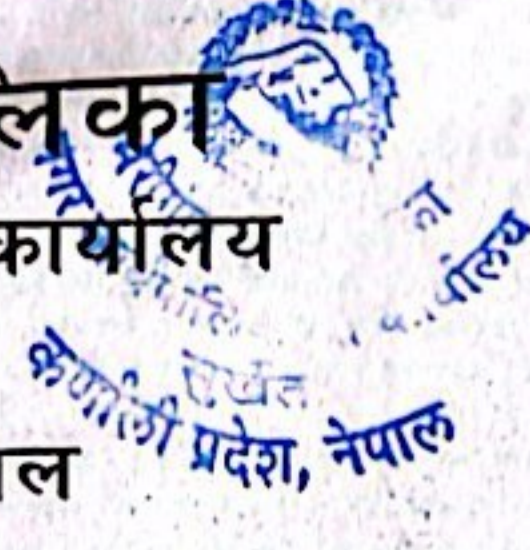

प.सं. :- ०८०/०८१
च नं. :

मिति : २०८०/०६/०९

विषय :- दररेट पेश गर्ने बारे सूचना ।

श्री सम्बन्धित सरोकारवाला सबै ।

प्रस्तुत बिषयमा यस भेरीगंगा नगरपालिकाको शौचालय निर्माण गर्नुपर्ने भएको हुदा निर्माण कार्यका लागि इच्छुक निर्माण व्यसायीले तपशिलका कागजपत्र सहित सूचना प्रकाशन मितिले ७ दिन भित्र (मिति २०८०/०६/१५ गते) के कति मुल्यमा निर्माण कार्य गर्न सकिन्छ, आफ्नो दररेट भेरीगंगा नगरपालिकाको वेबसाईटमा यसै पत्रसाथ संलग्न राखिएको BOQ मा अंक र अक्षरमा स्पष्ट लेखि सिलबन्दी गरि यस नगरपालिकाको कार्यालयमा पेश गर्नुहुन सम्बन्धित सरोकारवालामा यो सूचना प्रकाशित गरिएको छ ।

तपशिल :

- १.सुचिकृत भएको कागजपत्र/ सुचिकृत हुने निवेदन
- २.फर्मको दर्ता प्रमाण , स्थायी लेखा नं. , करचुक्ता पत्रहरूको प्रतिलिपि
- ३.निर्माण व्यसायी इजाजत पत्रको प्रतिलिपि
- ४.सिलबन्दी गरेको दररेट पत्र

(Signature)

(Signature)
१०.६.१९...
कृष्ण प्रसाद पोखरेल
प्रमुख प्रशासकीय अधिकृत

कृष्ण प्रसाद पोखरेल
प्रमुख प्रशासकीय अधिकृत



Name of Project :- भैरीगंगा नगरपालिका शौचालय निर्माण
Location of Site :- Bheriganga Municipality

Bheriganga Municipality
Office Of Municipal Executives

Chinchu, Surkhet
Karnali Province

BILL OF QUANTITIES (BOQ)



महोदय
नगरपालिका
सुर्खेत
कर्णाली प्रदेश, नेपाल

F/N:2080/81

S.N.	Description of Items	Unit	Quantity	Unit Rate (NRs.)		Amount (NRs.)	Remarks
				In Figures	In Words		
1	Site clearance	Sqm	15.51				
2	Dismetalling work (stone masonry structure)	Cum	1.89				
3	Earthwork in excavation for foundation in Hard/BMS soil	Cum	24.28				
4	Stone soiling work	Cum	2.86				
5	Providing, laying, compacting and curing 1:3:6 plain cement concrete for floor, proofing and all kinds of P.C.C. works	Cum	1.46				
6	Stone masonry work (1:6)	Cum	11.77				
7	Providing, laying, compacting and curing 1:1.5:3 plain cement concrete for slab, beams, tie beam, column, Lintel sill and all kinds of R.C.C. works	Cum	2.50				
8	Supply, fabricate, place and fix 19mm plywood formworks	Sq.m	20.88				
9	Supply, cut, fabricate, place and tie, Ribbed High Tensile Reinforcement steel bars including cost of binding wire	KG	230.43				
10	Providing and laying brick masonry First class chimney burnt bricks in wall, with cement and sand mortar 1:6	Cum	5.11				



Name of Project :- भैरीगंगा नगरपालिका शौचालय निर्माण
Location of Site :- Bheriganga Municipality

Bheriganga Municipality
Office Of Municipal Executives
Chinchu, Surkhet
Karnali Province

BILL OF QUANTITIES (BOQ)

भैरीगंगा नगरपालिका
नगर कार्यपालिका
चिन्चु, सुर्खेत
कर्णाली प्रदेश, नेपाल
प्रमुख प्रशासकीय अधिकृत

F/Y:2080/81

S.N.	Description of Items	Unit	Quantity	Unit Rate (NRs.)		Amount (NRs.)	Remarks
				In Figures	In Words		
11	12.5 mm thick cement sand plaster work (1:4)	Sq.m	46.16				
12	1:3 c/s plaster on ceiling surface	Sq.m	6.99				
13	Porcelain glazed Tile For floor	Sqm	3.90				
14	Porcelain glazed Tile For wall	Sqm	9.18				
15	Cement punning work	Sqm	0.64				
16	Electrification works including bulb, wiring works and switch board as per LS works)	LS	1.00				
17	Sal wood work for chauhath	Cum	0.06				
18	Supplying and fitting of Aluminium door	Sqm	2.59				
19	Supplying and fixing Porcelain clay white glazed Indian Pan	Nos	2.00				
20	Supplying and laying P.V.C. PIPES(6 kg/cm ²)	RM	4.00				



Bheriganga Municipality
Office Of Municipal Executives
Chinchu, Surkhet
Karnali Province



BILL OF QUANTITIES (BOQ)

कुषा प्रसाद पोखरेल
प्रमुख प्रशासकिय अधिकृत

Name of Project :- भरीगांगा नगरपालिका शौचालय निर्माण
Location of Site :- Bheriganga Municipality

F/Y:2080/81

S.N.	Description of Items	Unit	Quantity	Unit Rate (NRs.)		Amount (NRs.)	Remarks
				In Figures	In Words		
21	Supplying and fixing of 20 mm dia CPVC Pipe	RM	6.00				
22	Supplying & fixing of Tap	Nos	2.00				
				TOTAL AMOUNT WITHOUT VAT			
				VAT (@13%)			
				TOTAL AMOUNT WITH VAT			

Name of Firm:
Name of contractor /Representative:
Address:

Date:-
Seal of Firm:
Contact No. :